



PULLERS

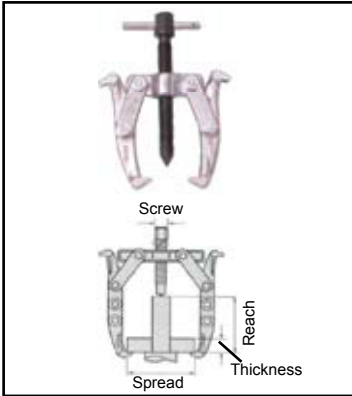

No. W012 SUPER 2 JAW GEAR PULLER- Japan

Stock No.	Item	Size	Spread (mm)	Reach (mm)	Thickness (mm)	Screw (mm)	Load (ton)	Unit Price (pc)
012-004-075	G 3	3"	40 - 75	55	30	14	2	
012-004-100	G 4	4"	50 -100	100	45	17	4	
012-004-150	G 6	6"	60 -150	150	60	19	6	
012-004-200	G 8	8"	80 -200	240	100	22	8	
012-004-250	G10	10"	100 -250	250	120	30	10	
012-004-300	G12	12"	120 -300	275	125	32	12	
012-004-375	G15	15"	150 -375	320	130	41	15	
012-004-450	G18	18"	180 -450	370	140	46	18	
012-004-600	G24	24"	280 -600	575	175	46	24	

Made of heat-treated alloy steel, forcing screw in phosphoric acid manganese film forming treatment, others in nickel-chrome plated.

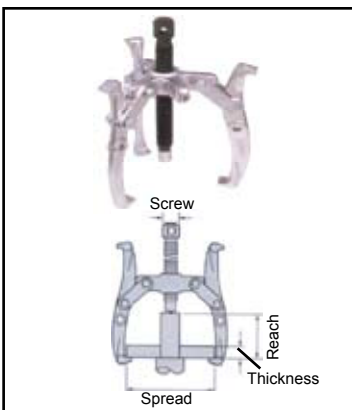

No. W012 SUPER 3 JAW GEAR PULLER- Japan

Stock No.	Item	Size	Spread (mm)	Reach (mm)	Thickness (mm)	Screw (mm)	Load (ton)	Unit Price (pc)
012-006-075	GP3-75	3"	40 - 75	75	40	14	2	
012-006-100	GT4	4"	50 - 100	100	45	19	5	
012-006-150	GTW6	6"	75 - 175	150	60	22	7.5	
012-006-200	GT8	8"	80 - 200	240	100	30	10	
012-006-250	GT10	10"	100 - 250	250	120	32	12	
012-006-300	GT12	12"	120 - 300	275	125	32	12	
012-006-375	GT15	15"	150 - 375	320	130	41	15	
012-006-450	GT18	18"	180 - 450	370	140	46	18	

Made of heat-treated alloy steel, forcing screw in phosphoric acid manganese film forming treatment, others in nickel-chrome plated.

Note : Item GP3-75 is Top Brand


Note : GTW-6 for 2 or 3 arms pulling.



No. W012 KD 3 JAW REVERSIBLE GEAR PULLER- USA

Stock No.	Item	Size	Spread	Reach	Centre Screw	Unit Price (pc)
012-007-2299	2299	6"	8"	5"	11/16"x9-1/8"	

Made of drop-forged and heat treated alloy steel, jaws reverse for inside and outside pulling and also reverse end to end to use either style font. Large spread and reach accomodate flywheels, pulleys and gears.

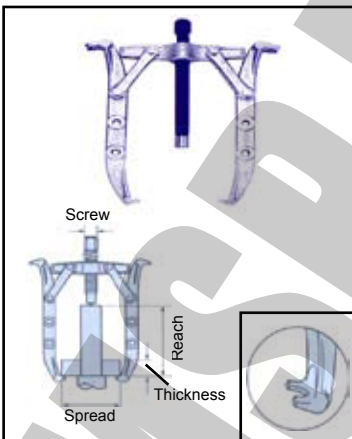

No. W012 SUPER 2 JAW LONG GEAR PULLER- Japan

Stock No.	Item	Size	Spread (mm)	Reach (mm)	Thickness (mm)	Screw (mm)	Load (ton)	Unit Price (pc)
012-008-04	GL 4	4"	50 - 100	150	60	17	4	
012-008-06	GL 6	6"	60 - 150	190	70	19	6	
012-008-08	GL 8	8"	80 - 200	275	100	22	8	
012-008-10	GL10	10"	100 - 250	300	125	30	10	
012-008-12	GL12	12"	120 - 300	350	170	32	12	
012-008-15	GL15	15"	150 - 375	400	185	41	15	
012-008-18	GL18	18"	180 - 450	440	200	46	18	

Made of heat-treated alloy steel, forcing screw in phosphoric acid manganese film forming treatment, others in nickel-chrome plated. Claw tip grooved for use with bearing separator.